


Fixed Speed Submersible Turbine Pumps

FE Petro has contributed innovative product designs for submersible pumps into the twenty-first century. With the introduction of a 2 hp fixed speed submersible pump, FE Petro also introduced the MagShell™ innovation to improve the profitability of retail operations.



2 HP vs. 1-1/2 HP Pump Performance

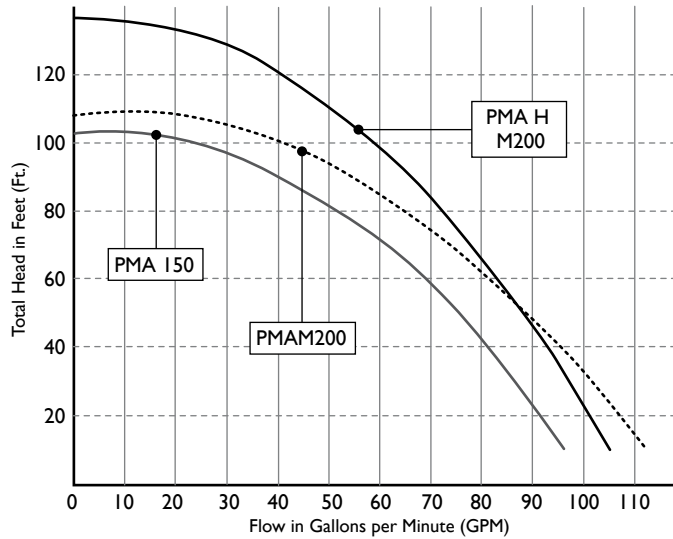

Advantages

Highest Flow - The STPM200 with MagShell™ provides flow rates previously unavailable in 4" fixed speed submersible turbine pumps. One pump can provide good flow rates for up to 10 retail nozzles flowing simultaneously. FE Petro offers the 2 hp performance in both standard and high pressure models to fit any application.

MagShell™ - MagShell™ is a feature on our 2 hp models. The pump motor shell is expanded to increase the flow area around the motor by 45%, resulting in significantly higher flow rates. MagShell™ is constructed of 304 stainless steel and is the highest performing 2 hp fixed speed submersible ever offered.

Faster Fueling Times - FE Petro 1-1/2 and 2 hp turbines fuel cars faster during peak business hours due to the higher pump performance.

Easy Upgrade - If you have existing STPs in your stations and want faster flow rates, consider upgrading to a 2 hp MagShell™ pump motor from FE Petro. The pump motor is compatible with existing FE Petro and competitive-make submersible pumps and can increase flow rates (1 to 2 gpm per nozzle with 5-8 nozzles operating) and go easy on your budget at the same time. FE Petro pump motors sell for about one-third the cost of a complete pump change-out.

2 HP Fixed Speed Submersible Turbine Pump Model Designation System

A typical turbine model designation has up to five components to define the pump being supplied as follows:

STP XXXXX Y - A - B

STP = Basic Model Designation

XXXXX = Factory Installed Options

STP model designations may include one or more of the following characters in alphabetical order:

AG = Alcohol-gasoline compatible (100% ethanol or methanol capable)
 Note: Standard models 0% to 15% ethanol or methanol capable.

F = Floating suction adapter (1-1/2" NPT female adapter)

H = High pressure (45 psi deadhead output)

K = Intake filter screen (IFS, factory installed to PMA)

M = MagShell™ (flow enhancing, expanded PMA shell)

*R = Model R check valve (24 psi relief/22 psi reset for PLLD)

*W = Model W check valve (16 psi relief/13 psi reset for PPM4000)

*Note: If not otherwise specified, all STP models supplied with standard model check valve (40 psi relief/35 psi reset for MLD and TS-LS300).

Y = Pump Motor Horsepower Rating

200 = 2 hp fixed speed

A = Model Length

VL1 = Variable length range #1.

VL2 = Variable length range #2.


VL3 = Variable length range #3.

Note: VL2 models fit 94% of all known installations.

B = Riser Pipe Length

Riser pipe length is expressed as two numeric characters that indicate the total length of the riser in inches. Riser pipes are available from 7" to 69" in 1" increments (additional charge for risers 31" or longer).

2 HP Fixed Speed Submersible Turbine Pump Specifications

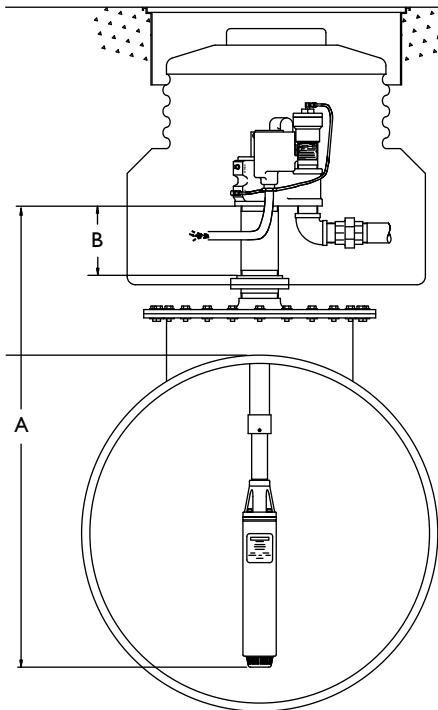

For full diagram see page 5.

Power Requirements

- 2 hp fixed speed models require single-phase, 208-230 VAC, 60 Hz incoming power.
- 2 hp fixed speed models incorporate a starting and running capacitor, with internal bleed resistor, rated 370 Volt, 40 microfarad.
- STP-SCI single-phase smart controllers and STP-CBS single-phase control boxes are available for 2 hp pump control.
- Max. motor draw: 12 Amps.

Pump Motor

- 2 hp fixed speed, 3450 rpm, multi-stage centrifugal type pump motor with integral, automatic, thermal overload protection.
- Standard pressure (two-stage) model, max. flow = 120 gpm, max. pressure = 36 psi.
- High pressure (H200, three-stage) model, max flow = 105 gpm, max. pressure = 45 psi.
- Available with MagShell™ for 45% increased flow area around motor.

Liquid Compatibility

- Max. liquid viscosity: 70 SSU at 60 °F (15 °C).
- Standard STP models are UL and cUL listed for fuel mixtures containing up to 15% ethanol or methanol, and 20% MTBE, 20% ETBE or 17% TAME with gasoline.
- STPAG (AG compatible) models are for fuel mixtures containing up to 100% ethanol or methanol, and 20% MTBE, 20% ETBE or 17% TAME with gasoline.
- 2 hp fixed speed models can also be used with diesel fuels, fuel oils, kerosene, Avgas and jet fuels in a non-gelled pourable state.
- All wetted elastomers are made of a high grade, fluorocarbon Viton® compound.

Standard Features

- 2 hp fixed speed models are available in variable length and fixed length options.
- Check valve: 2-3/4" diameter fluorocarbon Viton® seal constructed on cast aluminum body and steel backing washer.
- Pressure relief valve: available in four pressure relief settings, integral to check valve. Standard model relieves at 40 psi and resets above 35 psi.
- Syphon: venturi-type syphon primer supplied with every submersible. Syphon check valve and secondary syphon sold separately.
- Air eliminator: every submersible includes a tank return path with one-way check valve to provide active air elimination.
- Electrical disconnect: electrical yoke for positive contractor disconnect during service.

Approvals


- Consult factory for applicable approvals.

Quality Certification

- Franklin Fueling Systems is an ISO 9001 Certified Manufacturer.
- *Viton® is a registered trademark of DuPont Dow Elastomers.




2 HP Fixed Speed Turbine Performance Chart

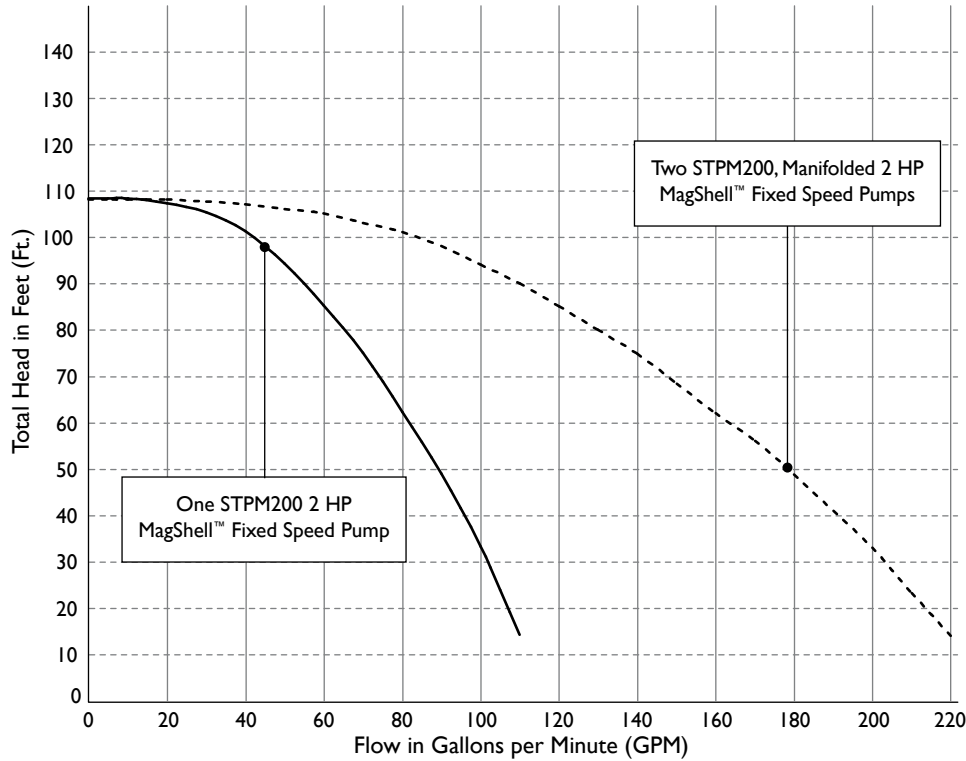

Note: Performance based on pumping solvent (0.78 specific gravity). Pressure is taken at the manifold discharge outlet. STPM200 models are powered by a single-phase, 60 Hz, 208/230 Volt power supply.

2 HP High Pressure Fixed Speed Turbine Performance Chart

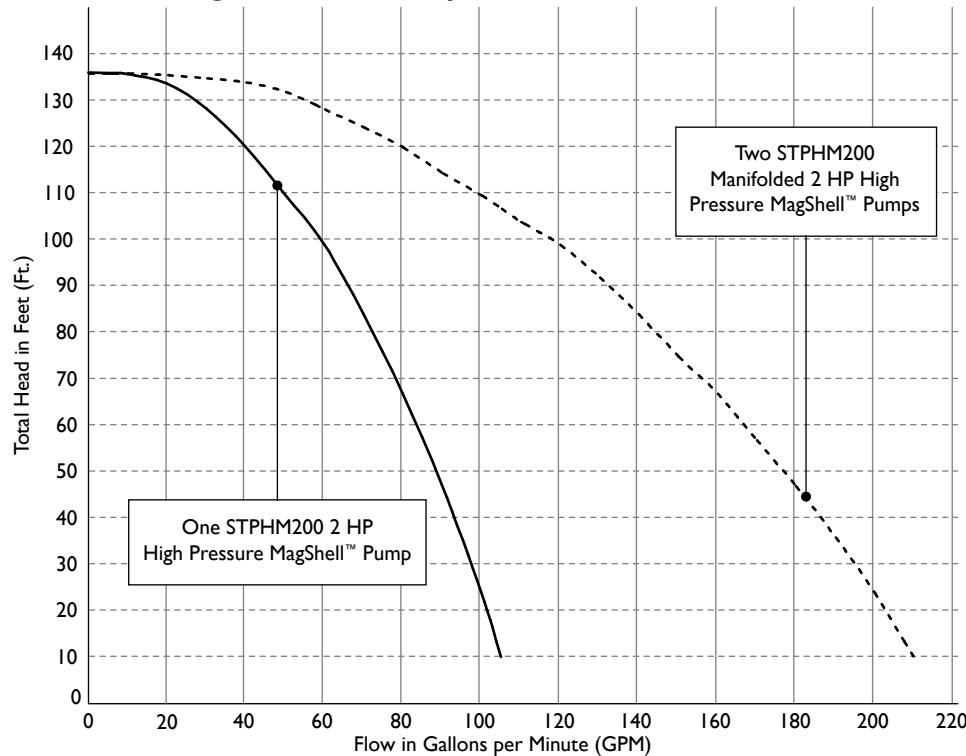

Note: Performance based on pumping solvent (0.78 specific gravity). Pressure is taken at the manifold discharge outlet. STPHM200 models are powered by a single-phase, 60 Hz, 208/230 Volt power supply.

2 HP Fixed Speed Submersible Turbine Pumps

Model	Description	Model Length Range Number	Model Length* Range
STPM200-VL1	2 hp fixed speed with MagShell™	VL1	63"-91"
STPM200-VL2	2 hp fixed speed with MagShell™	VL2	94"-154"
STPM200-VL3	2 hp fixed speed with MagShell™	VL3	126"-217"
STPHM200-VL1	2 hp high pressure fixed speed with MagShell™	VL1	63"-92"
STPHM200-VL2	2 hp high pressure fixed speed with MagShell™	VL2	94"-155"
STPHM200-VL3	2 hp high pressure fixed speed with MagShell™	VL3	126"-218"
Alcohol-Gasoline Model	Description	Model Length Range Number	Model Length* Range
STPAGM200-VL1	2 hp AG fixed speed with MagShell™	VL1	63"-91"
STPAGM200-VL2	2 hp AG fixed speed with MagShell™	VL2	94"-154"
STPAGM200-VL3	2 hp AG fixed speed with MagShell™	VL3	126"-217"
STPAGHM200-VL1	2 hp AG high pressure fixed speed with MagShell™	VL1	63"-92"
STPAGHM200-VL2	2 hp AG high pressure fixed speed with MagShell™	VL2	94"-155"
STPAGHM200-VL3	2 hp AG high pressure fixed speed with MagShell™	VL3	126"-218"

- Notes: 1. Remove "M" from model number for non-MagShell™ pump motor assembly.
 2. STP models are compatible with fuel mixtures containing: up to 15% ethanol or methanol with gasoline, and 20% MTBE, 20% ETBE or 17% TAME with gasoline.
 STPAG models are compatible with fuel mixtures containing: up to 100% ethanol or methanol with gasoline, and 20% MTBE, 20% ETBE or 17% TAME with gasoline.
 3. All models are supplied with a standard check valve unless factory option "R" or "W" is specified.
 4. All above models require single-phase, 208-230 VAC, 60 Hz incoming power.
 5. 4" riser pipe, if supplied locally, must be 4-1/2" OD by 3/16" WT tubing.
 6. For riser pipe lengths 31" to 69", adder charge applies.

*Model length (A) defined as the dimension from turbine manifold bottom to pump motor inlet.

Factory Installed Options

(specified in model number at time of STP order)

Designation	Description
F	Floating suction adapter, 1-1/2" NPT female, must be factory installed
K	IFS (intake filter screen) factory assembled to pump motor assembly
R	Model R check valve, factory installed, for Veeder-Root PLLD Line Leak
W	Model W check valve, factory installed, for Red Jacket PPM4000 Line Leak

Field Installed Options

(2 hp fixed speed specific accessories)

Part Number	Description
400137908	Syphon check valve, alcohol-gasoline compatible (when ordered with STP)
400818921	STP-CBS, single-phase control box with lockout switch, 110 Volt coil
402312921	STP-DHI-SCI, combo DHI with factory wired STP-SCI (when purchased with a 4" STP)
402312921	STP-DHI-SCI, combo DHI with factory wired STP-SCI (when purchased without a 4" STP)*
402313921	STP-DHI-CBS, combo DHI with factory wired STP-CBS
402459931	Model 65 psi check valve (for slave of manifolded STPs with Veeder-Root PLLD)
402507930	Secondary syphon kit (when two syphon primes are required for one STP)
5800100215	STP-SCI, single-phase smart controller (when purchased without a 4" STP)
5800100215	STP-SCI, single-phase smart controller (when purchased with a 4" STP)*
5800300100	STP-DHI, dispenser hook isolation for 110 Volt dispenser handle switches, up to eight each

*When purchasing STP-SCI or STP-DHI-SCI in equal quantities of fixed speed 4" STPs, the STP-SCI or STP-DHI-SCI will be invoiced at special discount pricing.